

Separations | **BPX-BIOD GC column**

More than five decades of innovative phase technologies and unique fused silica production capabilities, together provide end-to-end separation solutions for all applications.

Features and benefits


Optimized for specified ASTM biodiesel methods.

Recommended applications

ASTM biodiesel method (ASTM D6584).

Product specifications

Each BPX-BIOD GC column is tested at the maximum operating temperature for the column, and specific tests are undertaken to ensure the column meets inertness specifications and separation performance. This means you can be confident of a reliable separation, column after column.

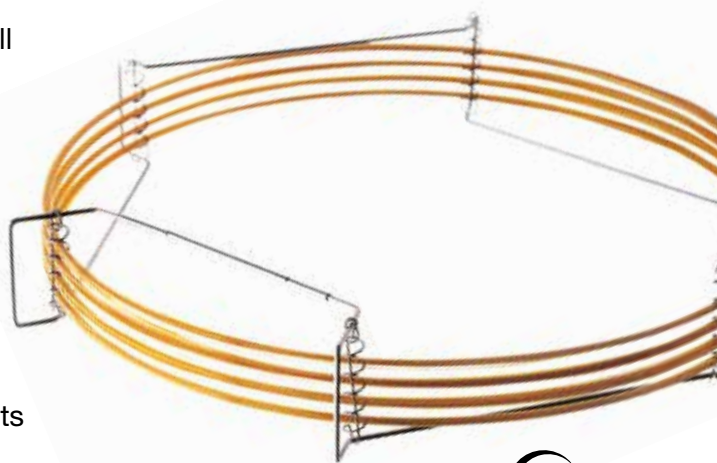

Method	Description	Column ID	Length (m)	Film thickness (µm)
ASTM D6584*¥	BPX – BIOD6584	0.32	10	0.1
ASTM D6584*¥	BPX – BIOD6584	0.32	15	0.1

*Recommended column in method

¥ Includes guard column

For more information about this product visit www.trajanscimed.com or contact techsupport@trajanscimed.com